

HIGHWAY AUTOMATIC VEHICLE CLASSIFICATION LIGHT CURTAIN DQLV series



Figure can vary

Contents

- Product description
- Technical data
- Product application
- Ordering information
- Outline size



Solutions



GB/T 19001-2016

Product description

The working principle of the vehicle separation light curtain is to achieve synchronized scanning of vehicles through linear arrangement of infrared light emission and reception. It converts the light signal into an electrical signal to comprehensively detect vehicle data. Compared with other detection technologies, infrared vehicle detection products are technologically mature, easy to install, have high-speed response, strong anti-interference capabilities, and can output rich vehicle technical information. They can reliably detect various types of special vehicles. Infrared vehicle scanning systems are mainly used in general highway toll stations, non-stop toll systems (ETC), automatic vehicle classification systems (AVC), highway weigh-in-motion systems (WIM), fixed over-height detection stations, customs vehicle management systems, and others.



Product application

1. Access control and security: Vehicle classification light curtains can be used in access control systems and security controls. They can detect vehicles entering or leaving specific areas and trigger corresponding operations, such as opening doors or activating alarms.
2. Highway toll stations: In highway toll stations, vehicle classification light curtains can be used to detect the entry and exit of vehicles, as well as vehicle billing. They can accurately measure the length and speed of vehicles to ensure accurate billing and smooth traffic flow.
3. Rail transit systems: In rail transit systems such as subways, light rails, and train stations, vehicle classification light curtains can be used to detect people or objects entering the track area to ensure passenger safety and prevent unnecessary accidents.

protective cover

The protective cover is made of stainless steel or aluminum alloy material to provide protection for the separator. It is equipped with built-in electric heating glass, temperature controller, and humidity controller. It automatically heats up when the humidity is too high or the temperature is too low, ensuring reliable use of the vehicle separator in humid areas, rainy or snowy weather, and cold seasons.



(Order separately)

- 1.It is specially used for detecting the light curtain when it is installed outdoors to protect the light curtain from impact damage.
- 2.Built-in electric heating glass can be automatically heated.
- 3.Internal temperature automatic control, when wet or heavy rain and fog vapor, automatic removal of snow and rain on the glass surface;
- 4.Box material: stainless steel, cold rolled steel plate, aluminum alloy, etc.
- 5.Antifogging glass: electric heating wire plus wire safety tempered glass, power 200W/set, power supply 24VDC;
- 6.Start heating when the temperature is lower than 0 °C (can be set on site); start heating when humidity is above 96% (can be set on site);
- 7.Overheat protection control: disconnect the heating when the temperature is higher than 45 °C.

Technical data

DQLV

Basic data	
Product model	DK-QLV series
Contains	A set safety light curtain and protective cover
Suitable for	DK-QT series and DK-QL series safety light curtains
Suitable for number of beams	4, 6, 8.....72
Suitable for beam resolution	20mm, 40mm, 80mm, 200mm
Detection field height	Detection height ≤1440mm safety light curtains
Protective cover height	1600mm and 1800mm optional (Contact customer service for customization of other sizes)
Protection distance	0.3-5m, 0.3-10m, 0.3-15m, 0.3-20m, 0.3-25m, 0.3-30m (optional)
Glass window length	≤1600mm
Protective cover data	
Shell material	Stainless steel or aluminum alloy material
Window material	Heatable glass
Type of fastening	Floor mounting, Mounting plate
Mounting material	Steel plate
Heating power supply	24V 10A
Main thermostat	Disc package Closing temperature 4°C Disconnecting temperature 29°C
Standby thermostat	Closure temperature of disc packaging 55°C and disconnection temperature 36°C
Humidity switch	Relative humidity of mechanical nylon membrane trigger switch is 20-80%.
Status indicator	Red LED light in front of heater when starting.
Temperature range	Normal operating temperature - 20°C+70°C.

FOSHAN DAIDISIKE PHOTOELECTRIC TECHNOLOGY CO., LTD.


Workshop 1002, Gate A, Building 5, Jicheng Kechuang Park, Beijiao Town, Shunde District, Foshan, Guangdong, China

Contact: Julie TEL: +86 15218909599 Email: julie-z@daidisiike.cn Web: www.fsddsk.com

DQLV safety light curtain model specification

DQLV 08 / 40 - 280 - R A E J - E

Example: DQLV08/40-280-RAEJ-E

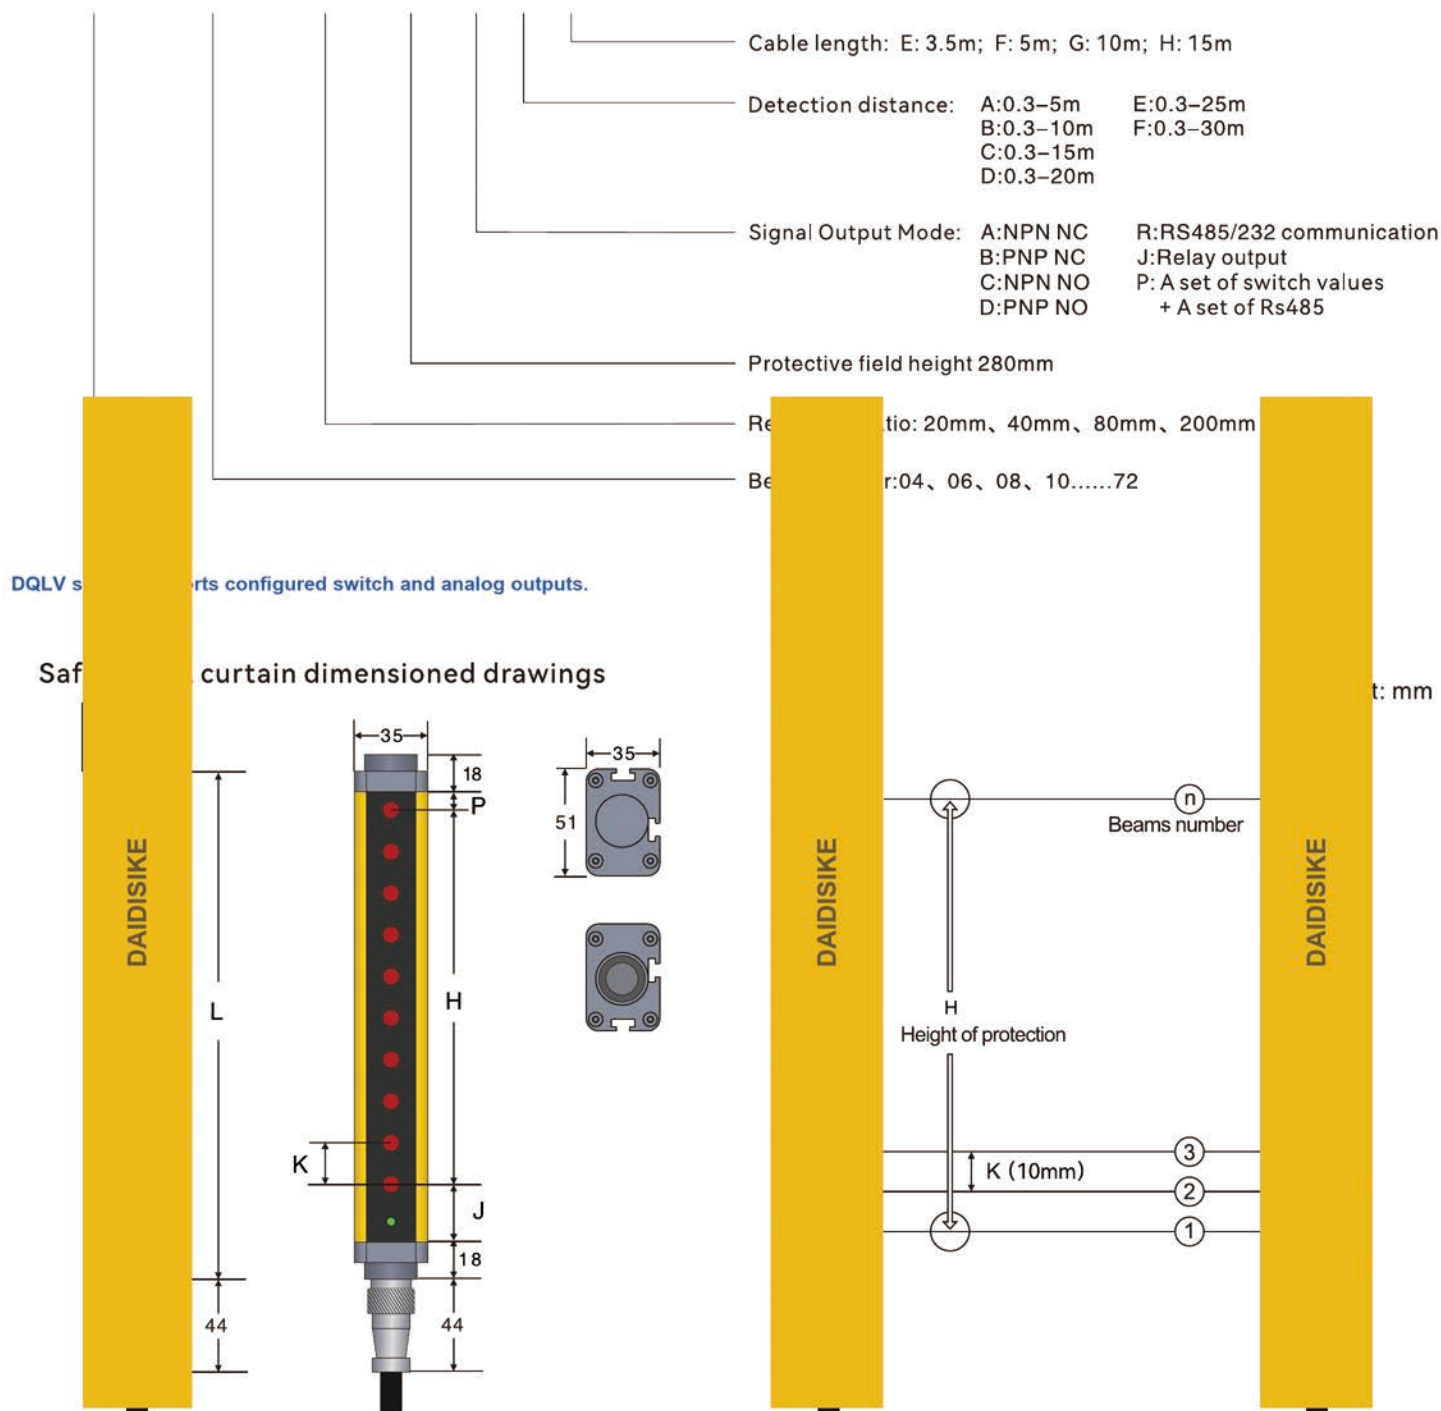

Remarks: L:Total length of light screen
L=18+P+H+J+18

H:Height of protected area
H= (n-1) * K

K:Resolution ratio
n:Beams number

K (mm)	20	40	80	200
P (mm)	10	20	40	20

FOSHAN DAIDISIKE PHOTOELECTRIC TECHNOLOGY CO., LTD.

Workshop 1002, Gate A, Building 5, Jicheng Kechuang Park, Beijiao Town, Shunde District, Foshan, Guangdong, China

Contact: Julie TEL: +86 15218909599 Email: julie-z@daidisiike.cn Web: www.fsddsk.com

DQLV series ordering information

Resolution	Light beam	Protection height (H)	Total height (L)	Product model	Detection distance
20mm (K)	4	60	133	DQLV	0.3-5m
	6	100	173	DQLV	0.3-5m
	8	140	213	DQLV	0.3-5m
	10	180	253	DQLV	0.3-5m
	12	220	293	DQLV	0.3-5m
	14	260	333	DQLV	0.3-5m
	16	300	373	DQLV	0.3-5m
	18	340	413	DQLV	0.3-5m
	20	380	453	DQLV	0.3-5m
	22	420	493	DQLV	0.3-5m
	24	460	533	DQLV	0.3-5m
	26	500	573	DQLV	0.3-5m
	28	540	613	DQLV	0.3-5m
	30	580	653	DQLV	0.3-5m
	32	620	693	DQLV	0.3-5m
40mm (K)	4	120	201	DQLV	0.3-5m
	6	200	281	DQLV	0.3-5m
	8	280	361	DQLV	0.3-5m
	10	360	441	DQLV	0.3-5m
	12	440	521	DQLV	0.3-5m
	14	520	601	DQLV	0.3-5m
	16	600	681	DQLV	0.3-5m
	18	680	761	DQLV	0.3-5m
	20	760	841	DQLV	0.3-5m
	22	840	921	DQLV	0.3-5m
	24	920	1001	DQLV	0.3-5m
	26	1000	1081	DQLV	0.3-5m
	28	1080	1161	DQLV	0.3-5m
	30	1160	1241	DQLV	0.3-5m
	32	1240	1321	DQLV	0.3-5m
80mm (K)	4	240	341	DQLV	0.3-5m
	6	400	501	DQLV	0.3-5m
	8	560	661	DQLV	0.3-5m
	10	720	821	DQLV	0.3-5m
	12	880	981	DQLV	0.3-5m
	14	1040	1141	DQLV	0.3-5m
	16	1200	1301	DQLV	0.3-5m
	18	1360	1461	DQLV	0.3-5m
	20	1520	1621	DQLV	0.3-5m
	22	1680	1781	DQLV	0.3-5m
	24	1840	1941	DQLV	0.3-5m
	26	2000	2101	DQLV	0.3-5m
	28	2160	2261	DQLV	0.3-5m
	30	2320	2421	DQLV	0.3-5m
	32	2480	2581	DQLV	0.3-5m

Note: If there are no special requirements, the default detection distance is 5m. If the detection distance needs to reach 5m or more.

FOSHAN DAIDISIKE PHOTOELECTRIC TECHNOLOGY CO., LTD.


Workshop 1002, Gate A, Building 5, Jicheng Kechuang Park, Beijiao Town, Shunde District, Foshan, Guangdong, China

Contact: Julie TEL: +86 15218909599 Email: julie-z@daidisiike.cn Web: www.fsddsk.com

200mm (K)				Product model	Detection distance
	4	600	681	DK-QLV04/200-600	0.3-5m
	6	1000	1081	Product model	0.3-5m
	8	1400	1481	DQLV	0.3-5m
	10	1800	1881	DQLV	0.3-5m
	12	2200	2281	DQLV	0.3-5m
	14	2600	2681	DQLV	0.3-5m
	16	3000	3081	DQLV	0.3-5m

DQLV	ce needs to reach 5m or more,
DQLV	
DQLV	
DQLV	
DQLV	


DQLV safety light curtain operation and display

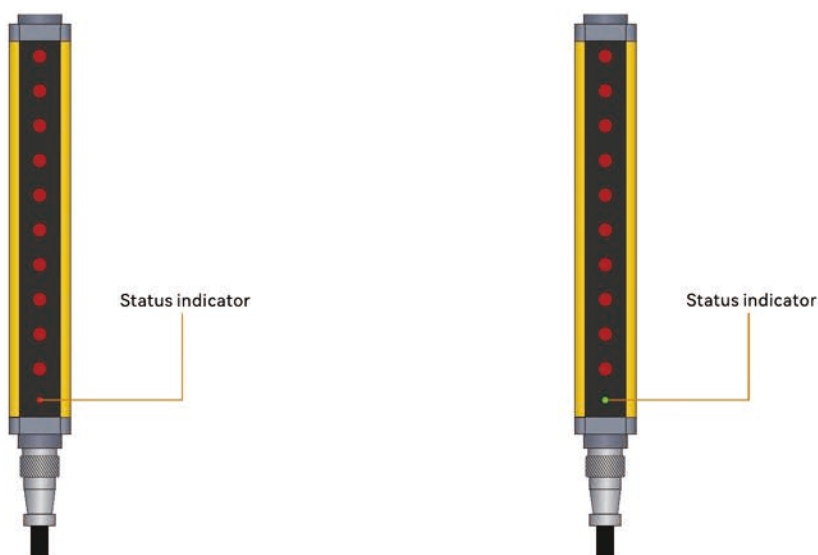


Normal operation of light curtain	LED Indicator status	Explain
Emitter	Red, always on	Turns on the power
	Receiver and emitter are red	Receiver and Emitter are not aligned
Receiver	Green	All light paths are connected
	Red	Light path shading
	Lights flashing	Interference or overstep detection range

1. Safety light curtain signal output selection (actual output of transistor working normally)


NPN NC

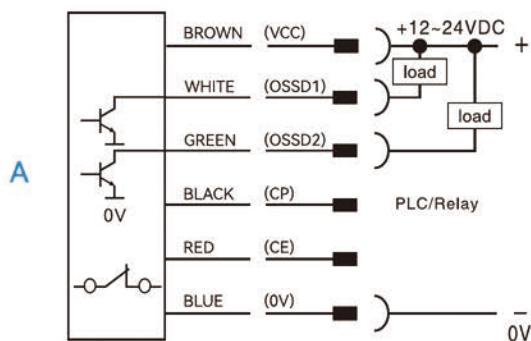


PNP NC

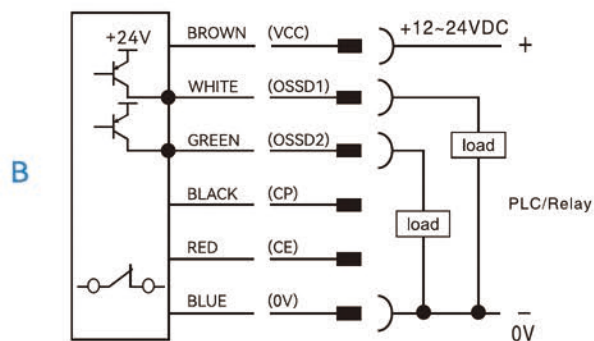

NPN NO

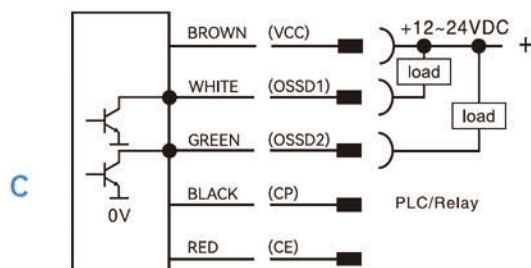


PNP NO

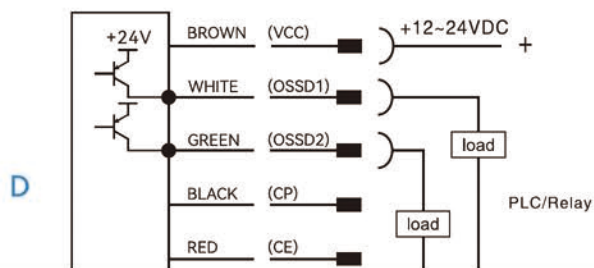


FOSHAN DAIDISIKE PHOTOELECTRIC TECHNOLOGY CO., LTD.

Workshop 1002, Gate A, Building 5, Jicheng Kechuang Park, Beijiao Town, Shunde District, Foshan, Guangdong, China
 Contact: Julie TEL: +86 15218909599 Email: julie-z@daidisiike.cn Web: www.fsddsk.com

2. RS485/RS232 wiring diagram

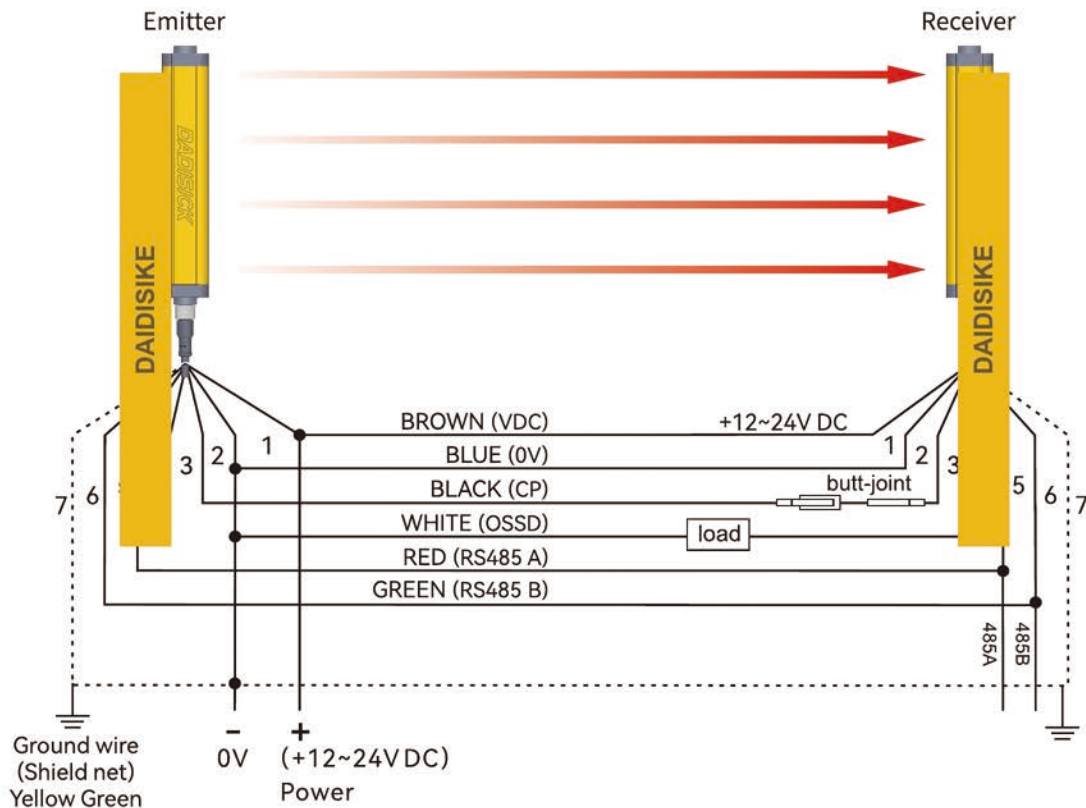

3. PNP output wiring diagram

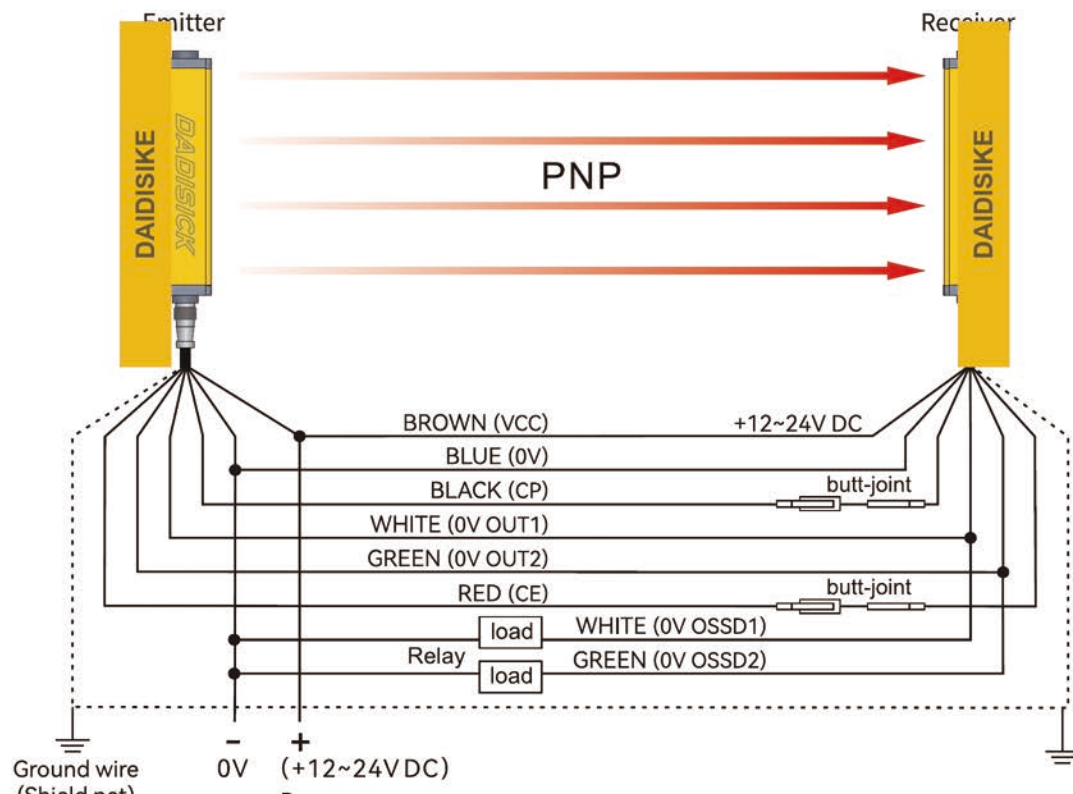



FOSHAN DAIDISIKE PHOTOELECTRIC TECHNOLOGY CO., LTD.

Workshop 1002, Gate A, Building 5, Jicheng Kechuang Park, Beijiao Town, Shunde District, Foshan, Guangdong, China
Contact: Julie TEL: +86 15218909599 Email: julie-z@daidisiike.cn Web: www.fsddsk.com

Resolution	Light beam	Protection height (H)	Total height (L)	Product model	Detection distance
200mm (K)	4	600	681	DQLV04/200-600	0.3-5m
	6	1000	1081	DQLV06/200-1000	0.3-5m
	8	1400	1481	DQLV08/200-1400	0.3-5m
	10	1800	1881	DQLV10/200-1800	0.3-5m
	12	2200	2281	DQLV12/200-2200	0.3-5m
	14	2600	2681	DQLV14/200-2600	0.3-5m
	16	3000	3081	DQLV16/200-3000	0.3-5m

Note: If there are no special requirements, the default detection distance is 5m. If the detection distance needs to reach 5m or more, please explain in advance.


DQLV safety light curtain operation and display

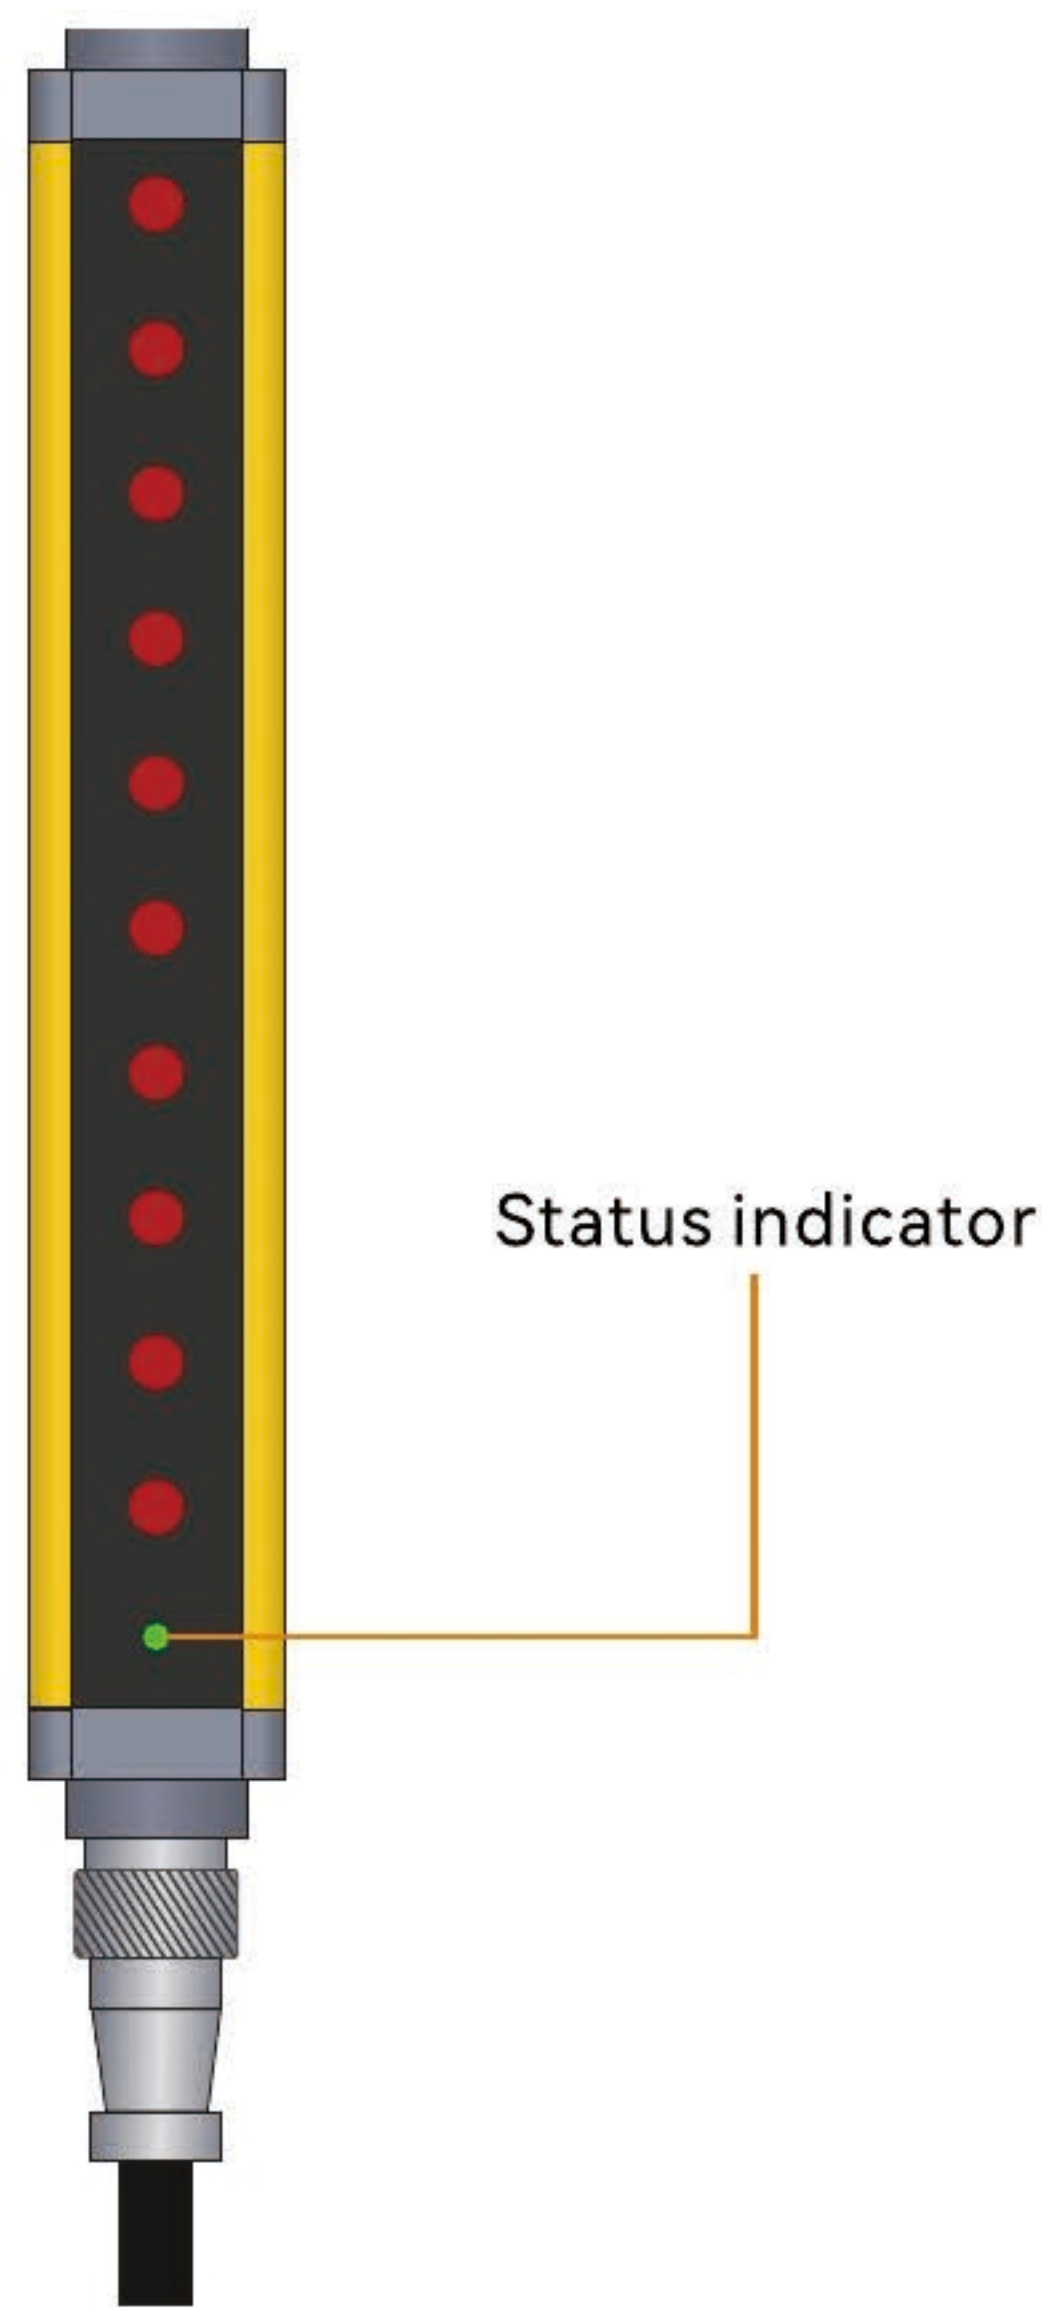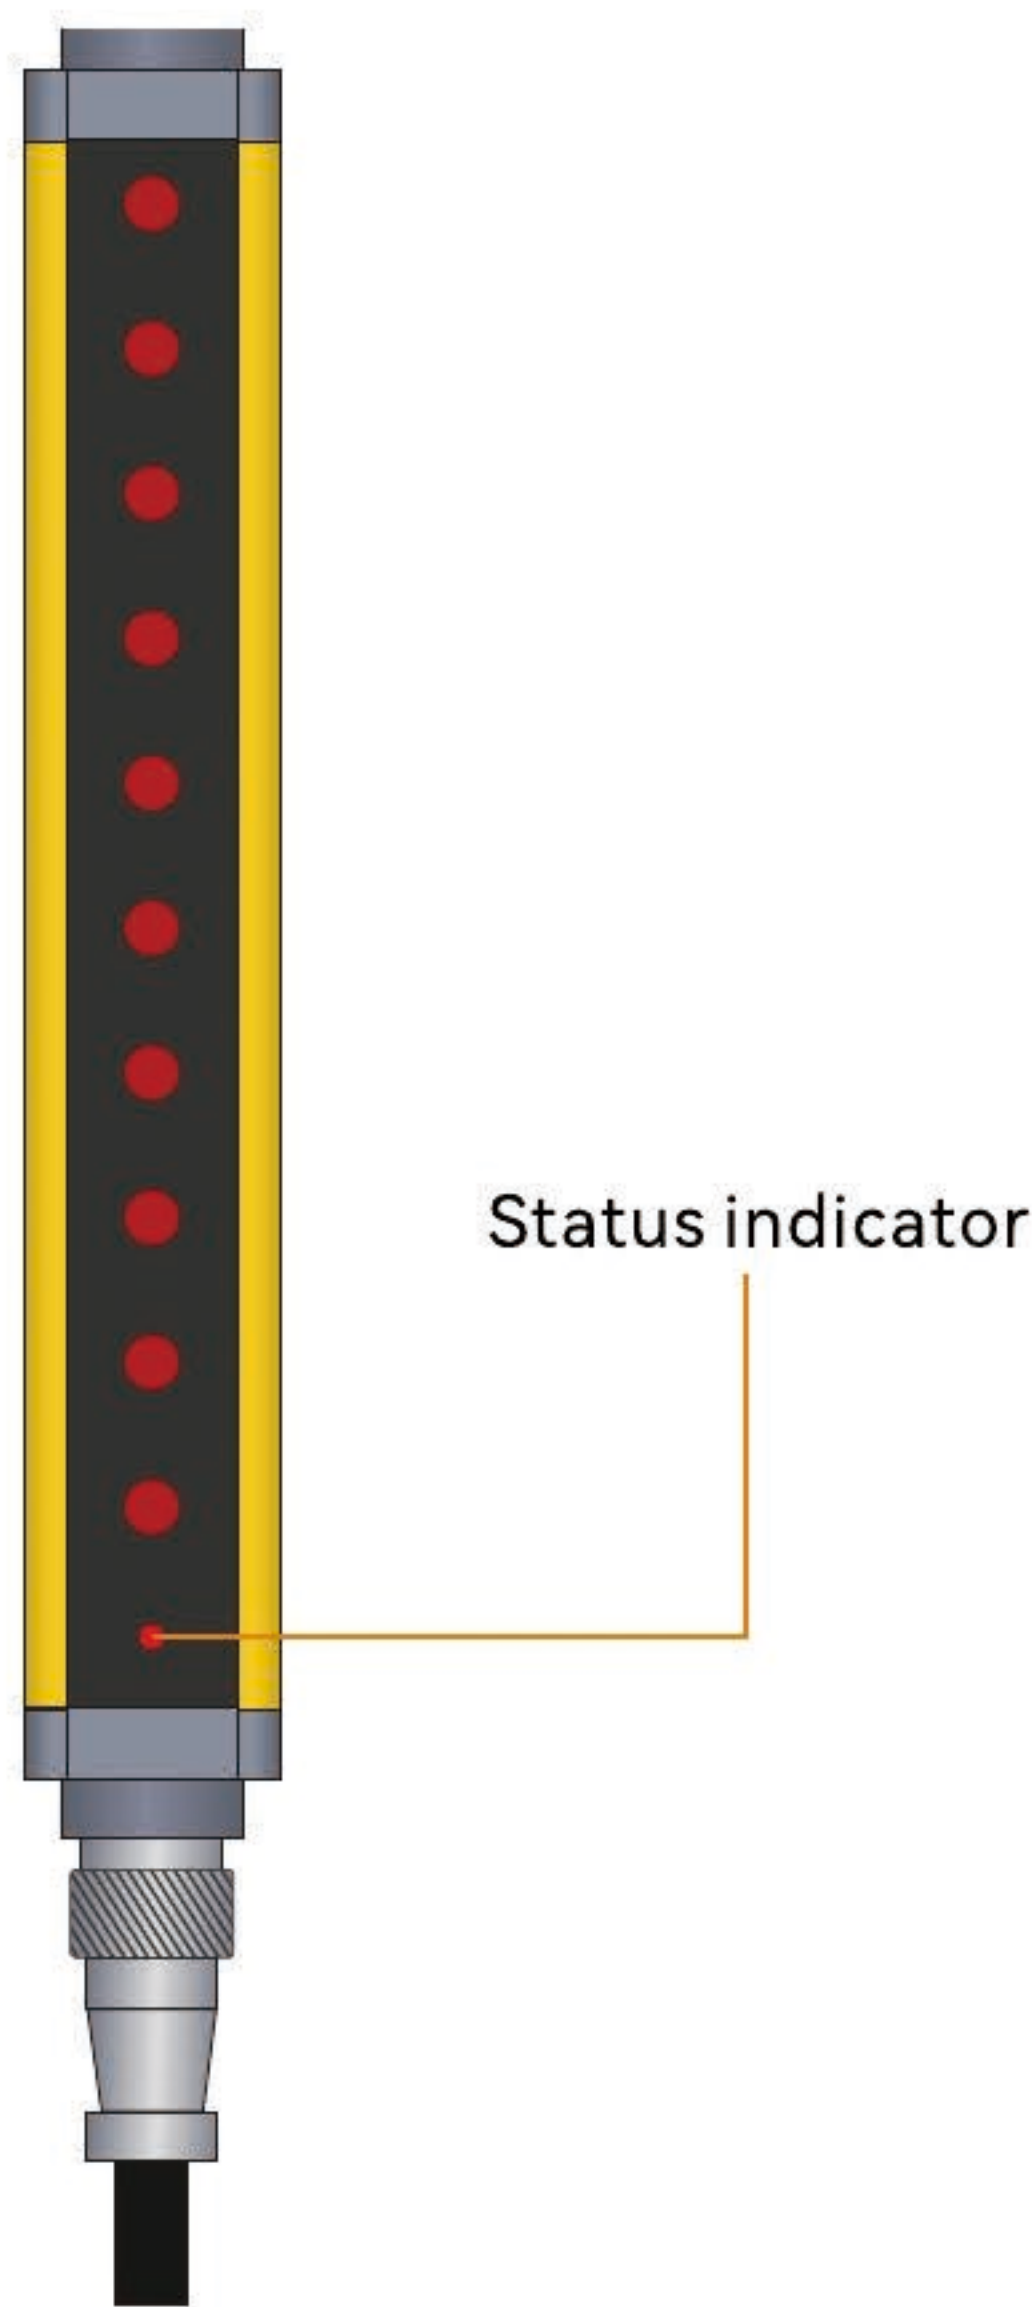


Normal operation of light curtain	LED Indicator status	Explain
Emitter	Red, always on	Turns on the power
	Receiver and emitter are red	Receiver and Emitter are not aligned
Receiver	Green	All light paths are connected
	Red	Light path shading
	Lights flashing	Interference or overstep detection range

1. Safety light curtain signal output selection (actual output of transistor working normally)


NPN NC

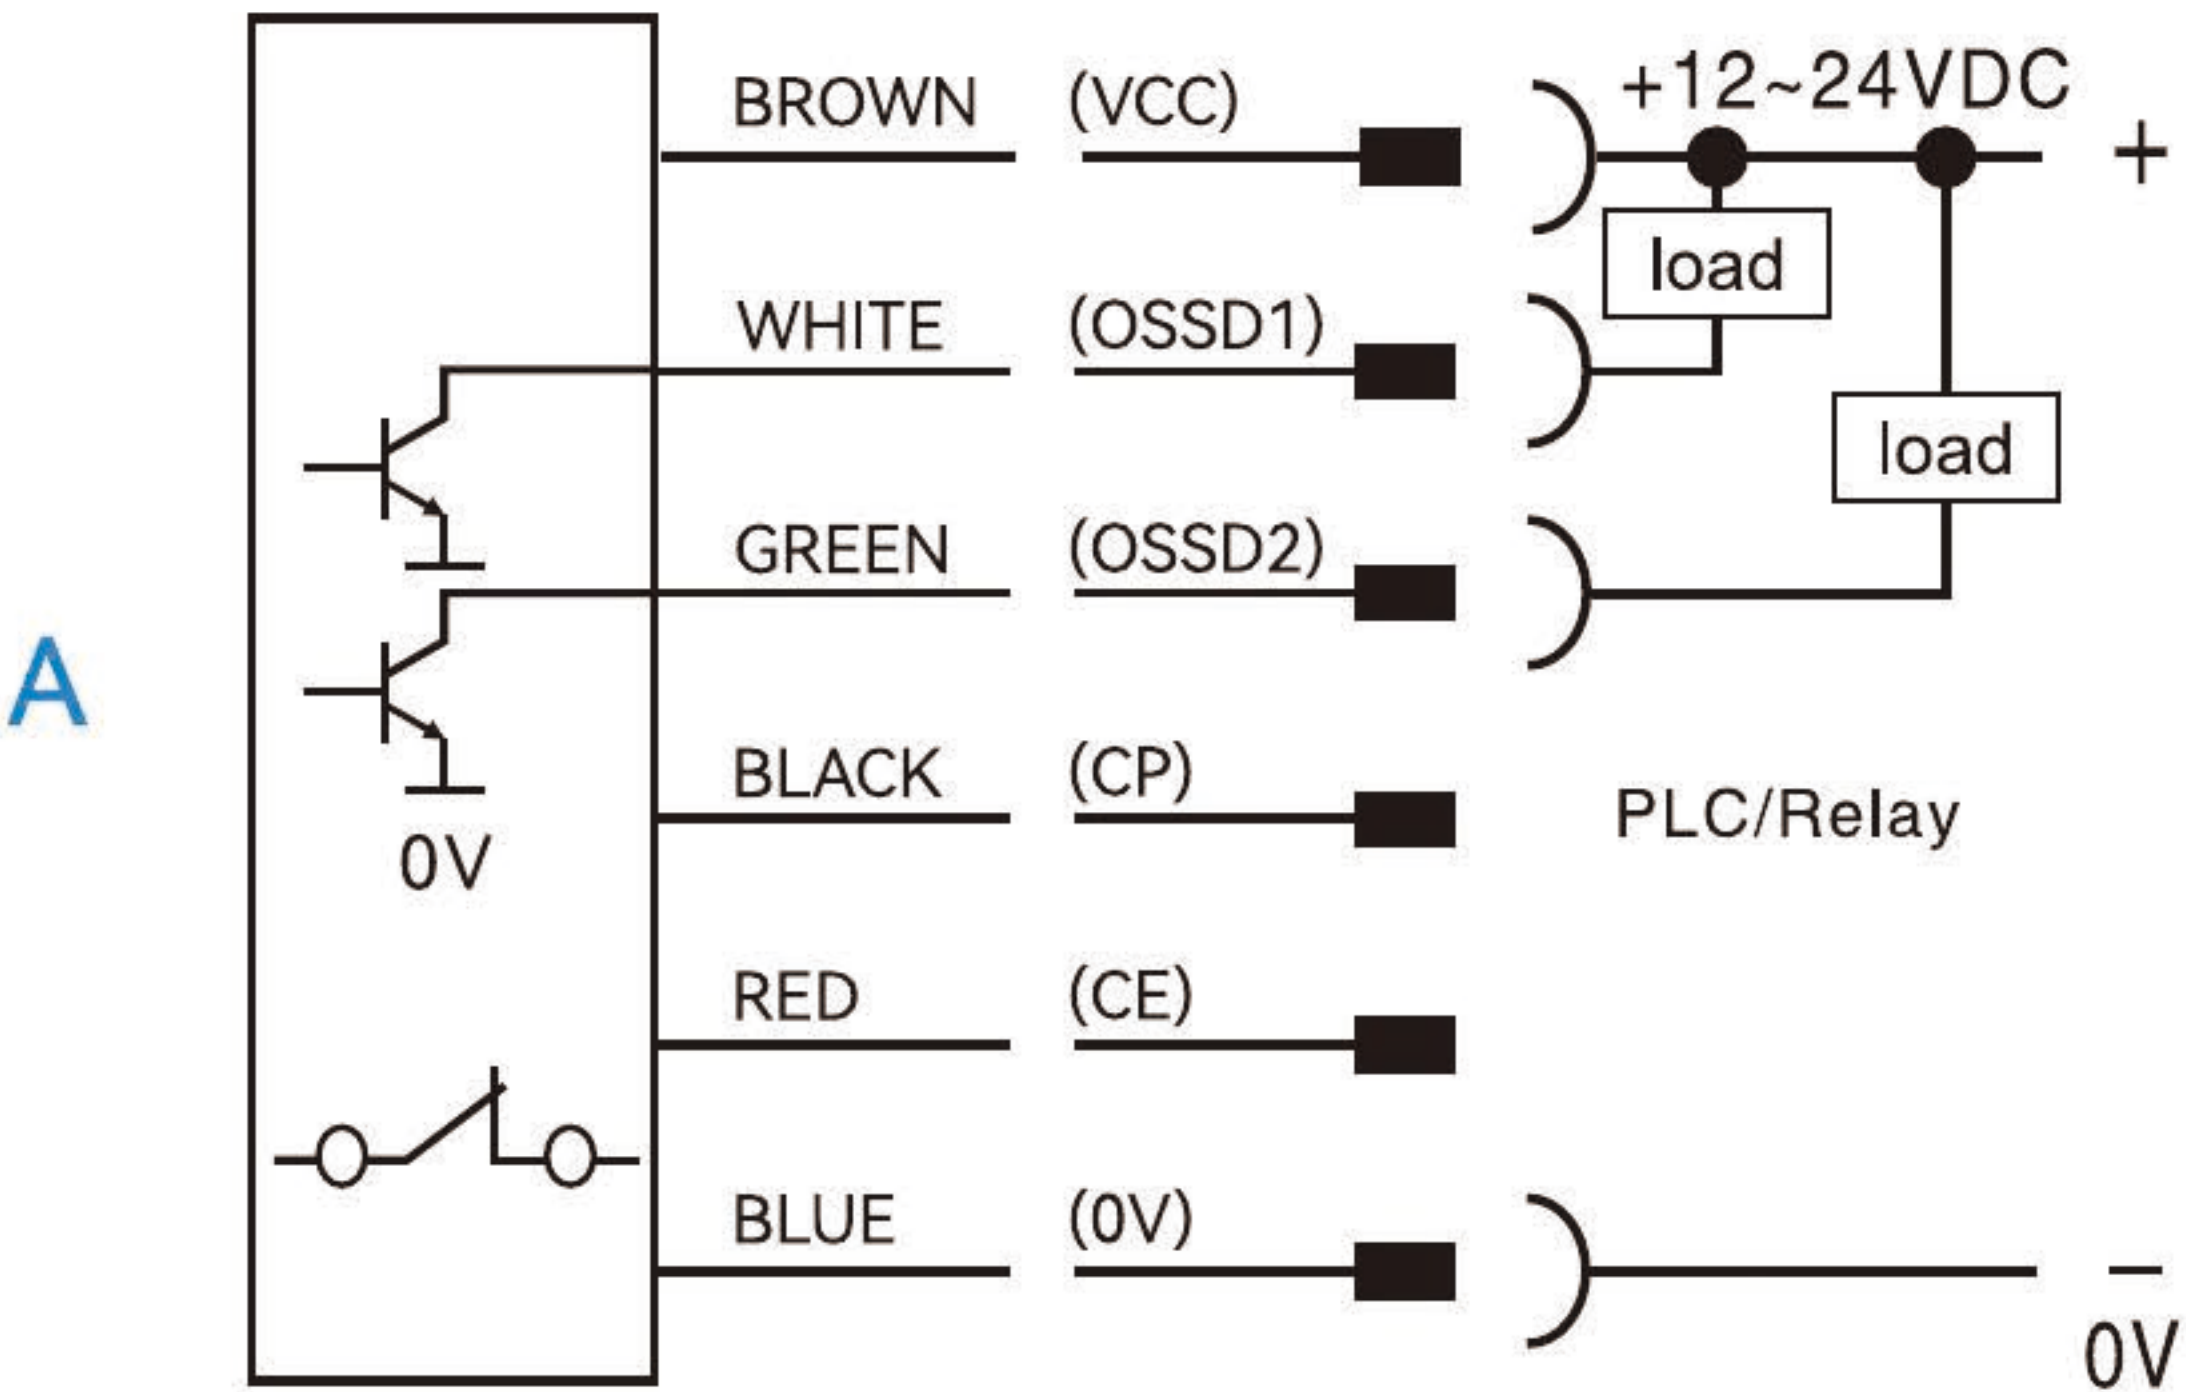


PNP NC

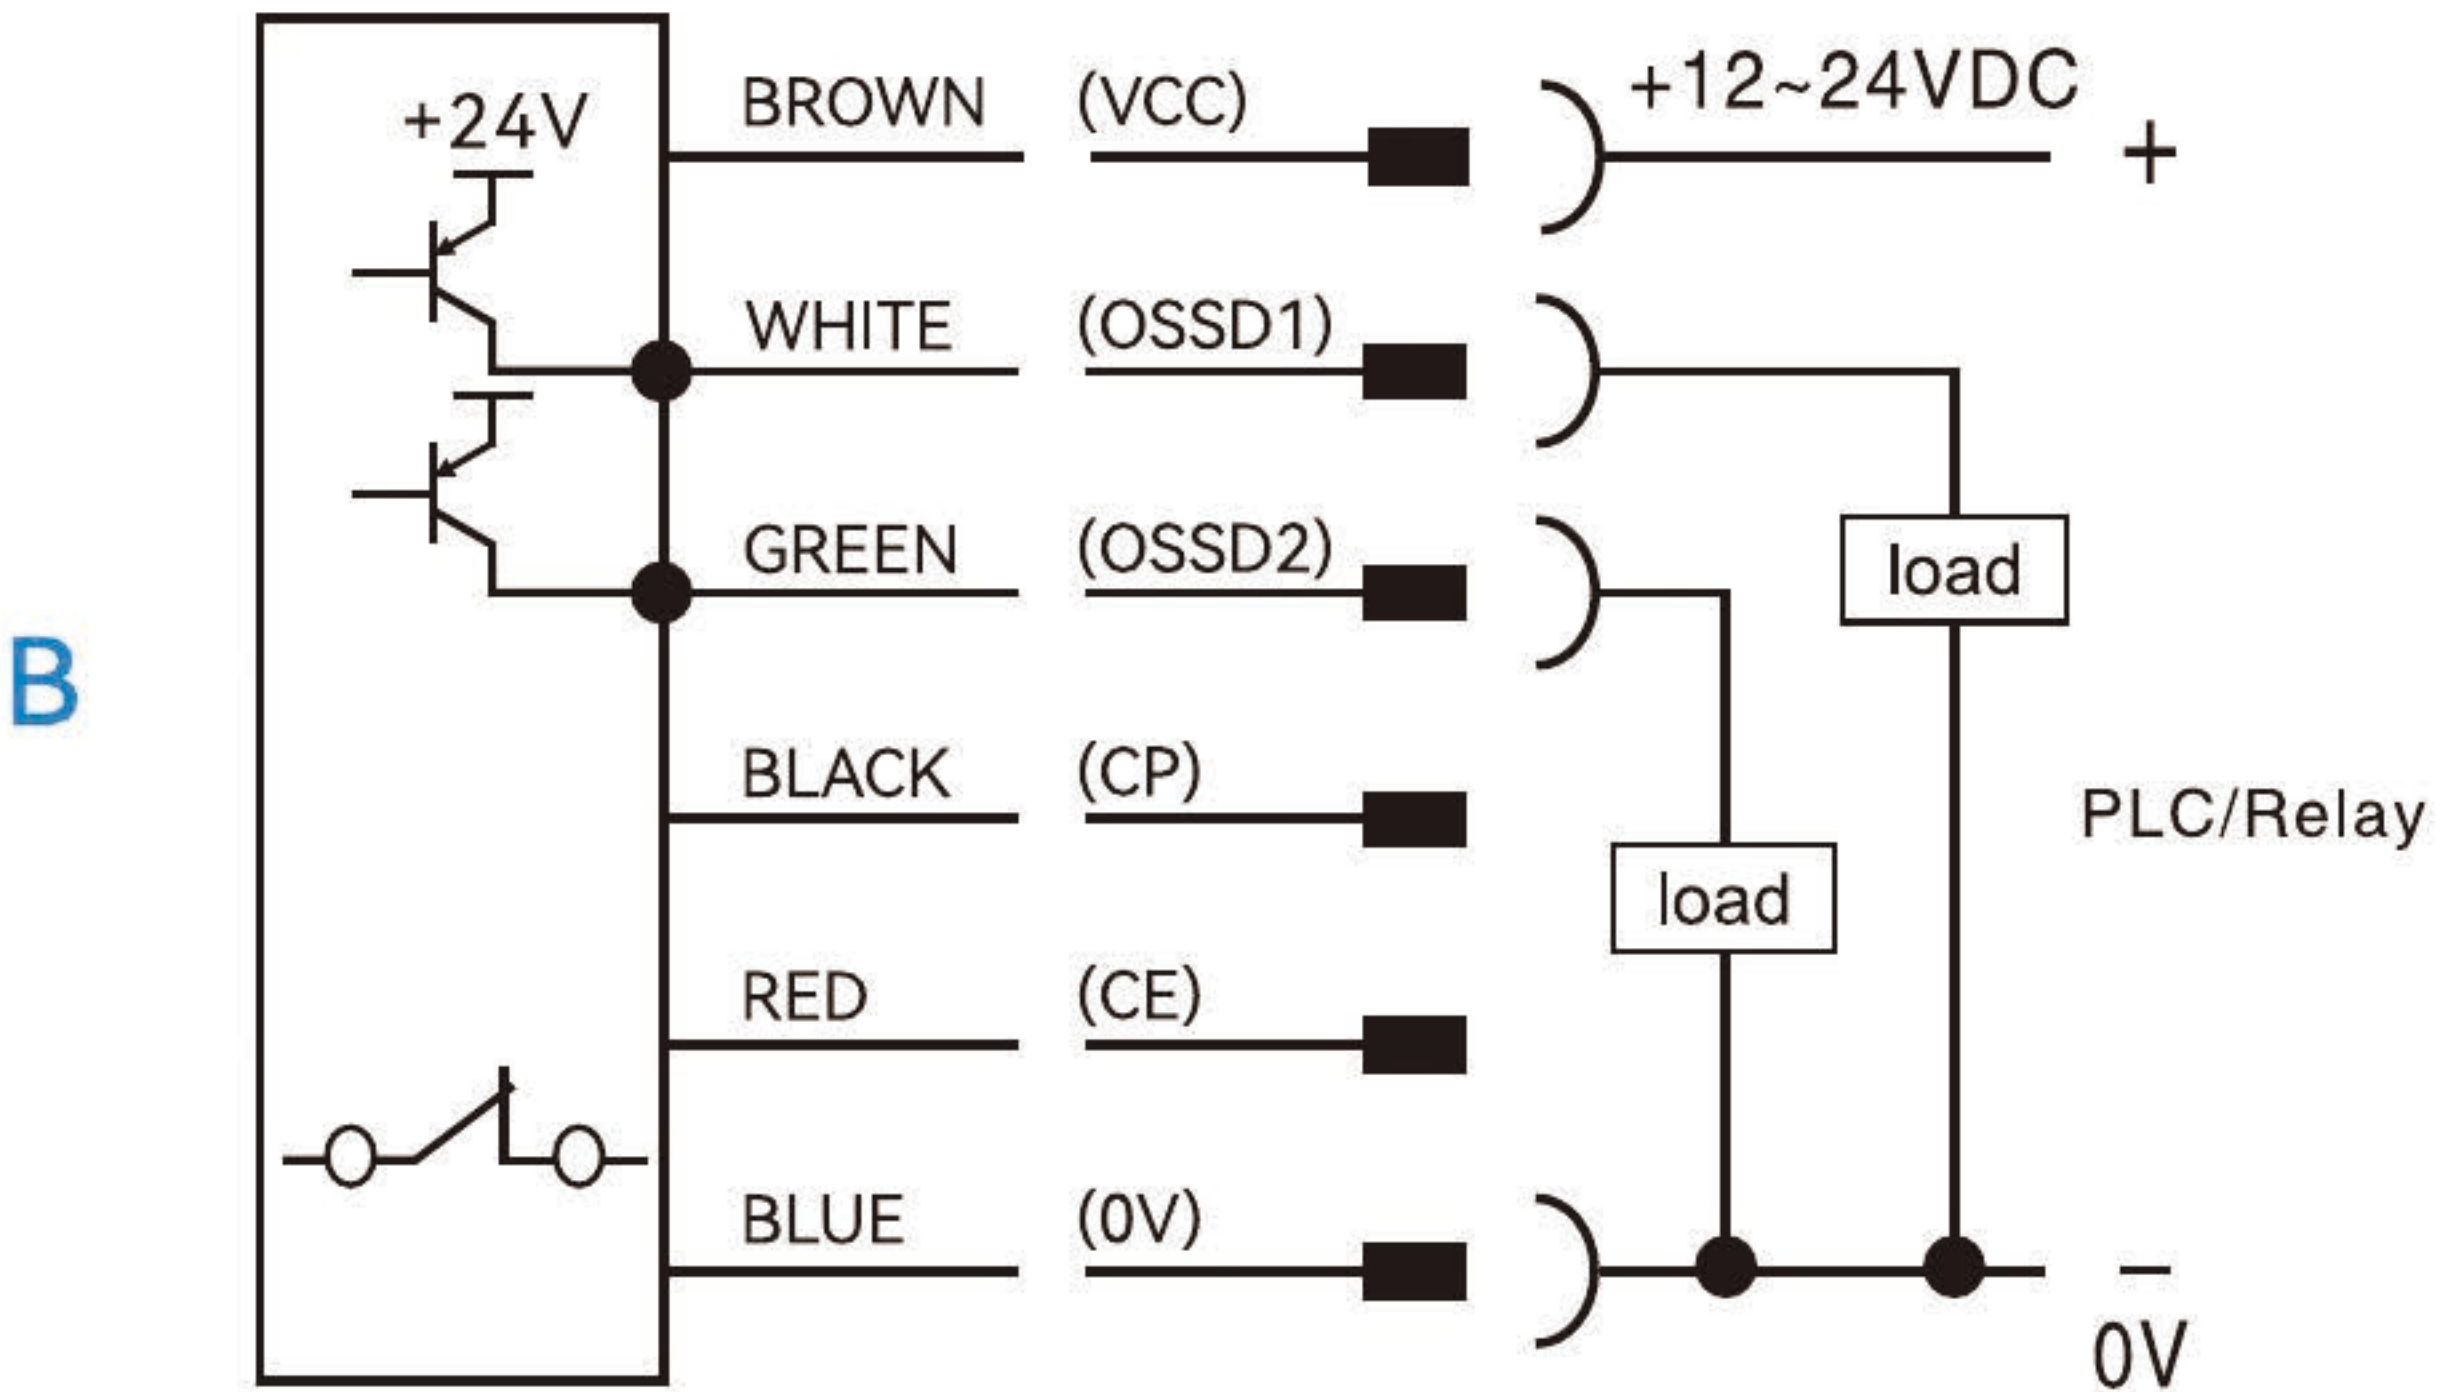


NPN NO

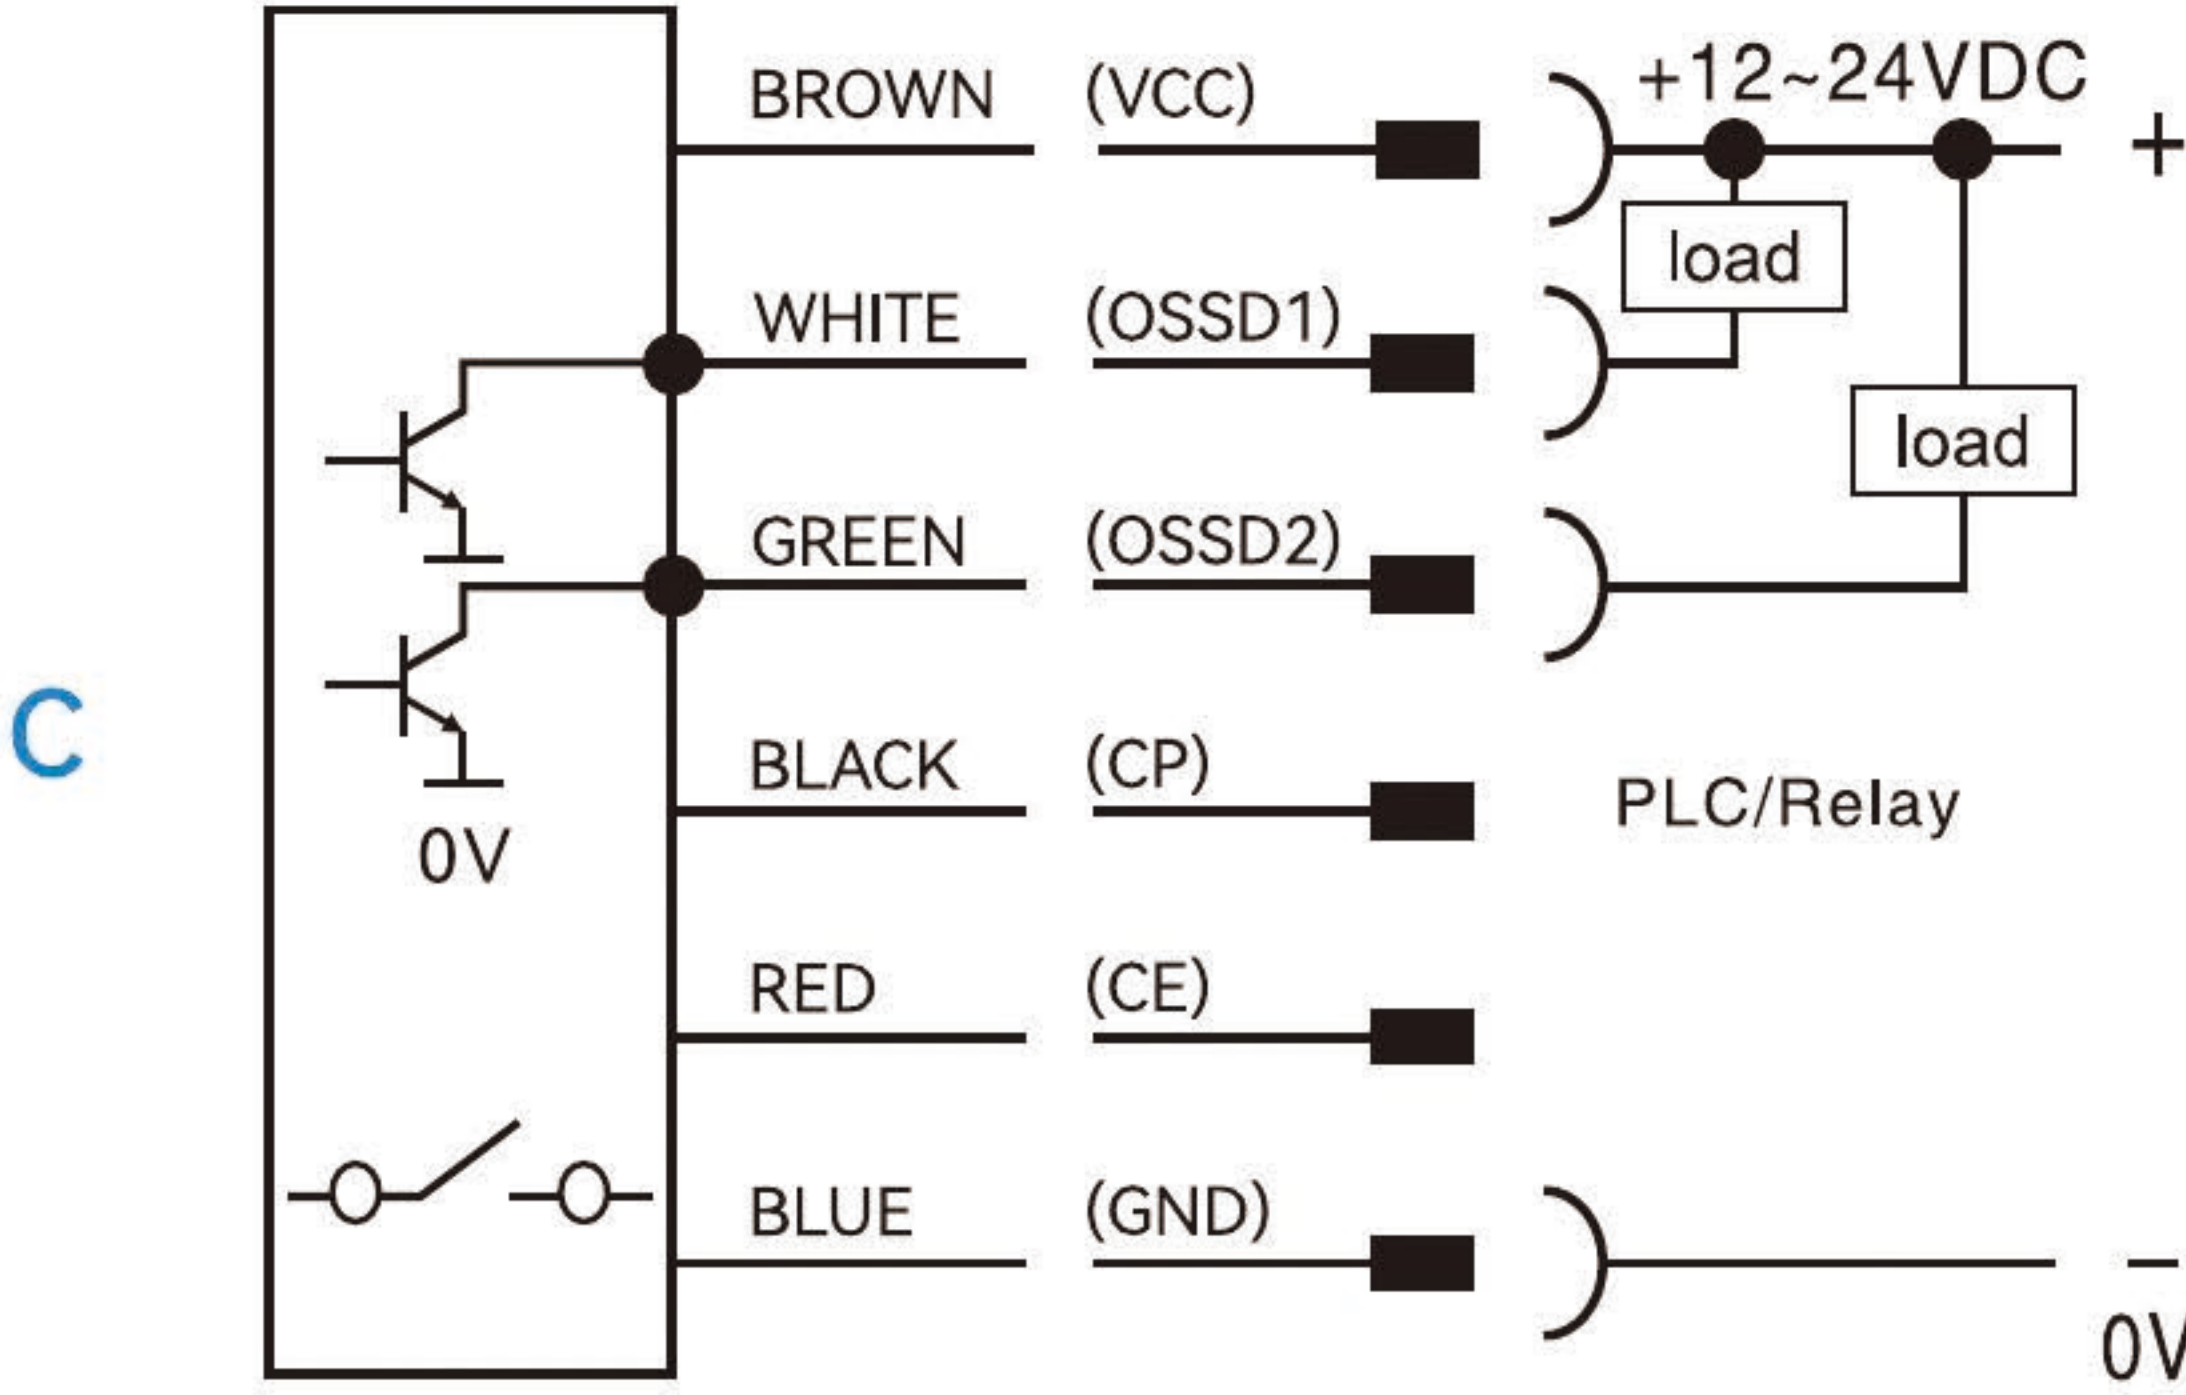

PNP NO

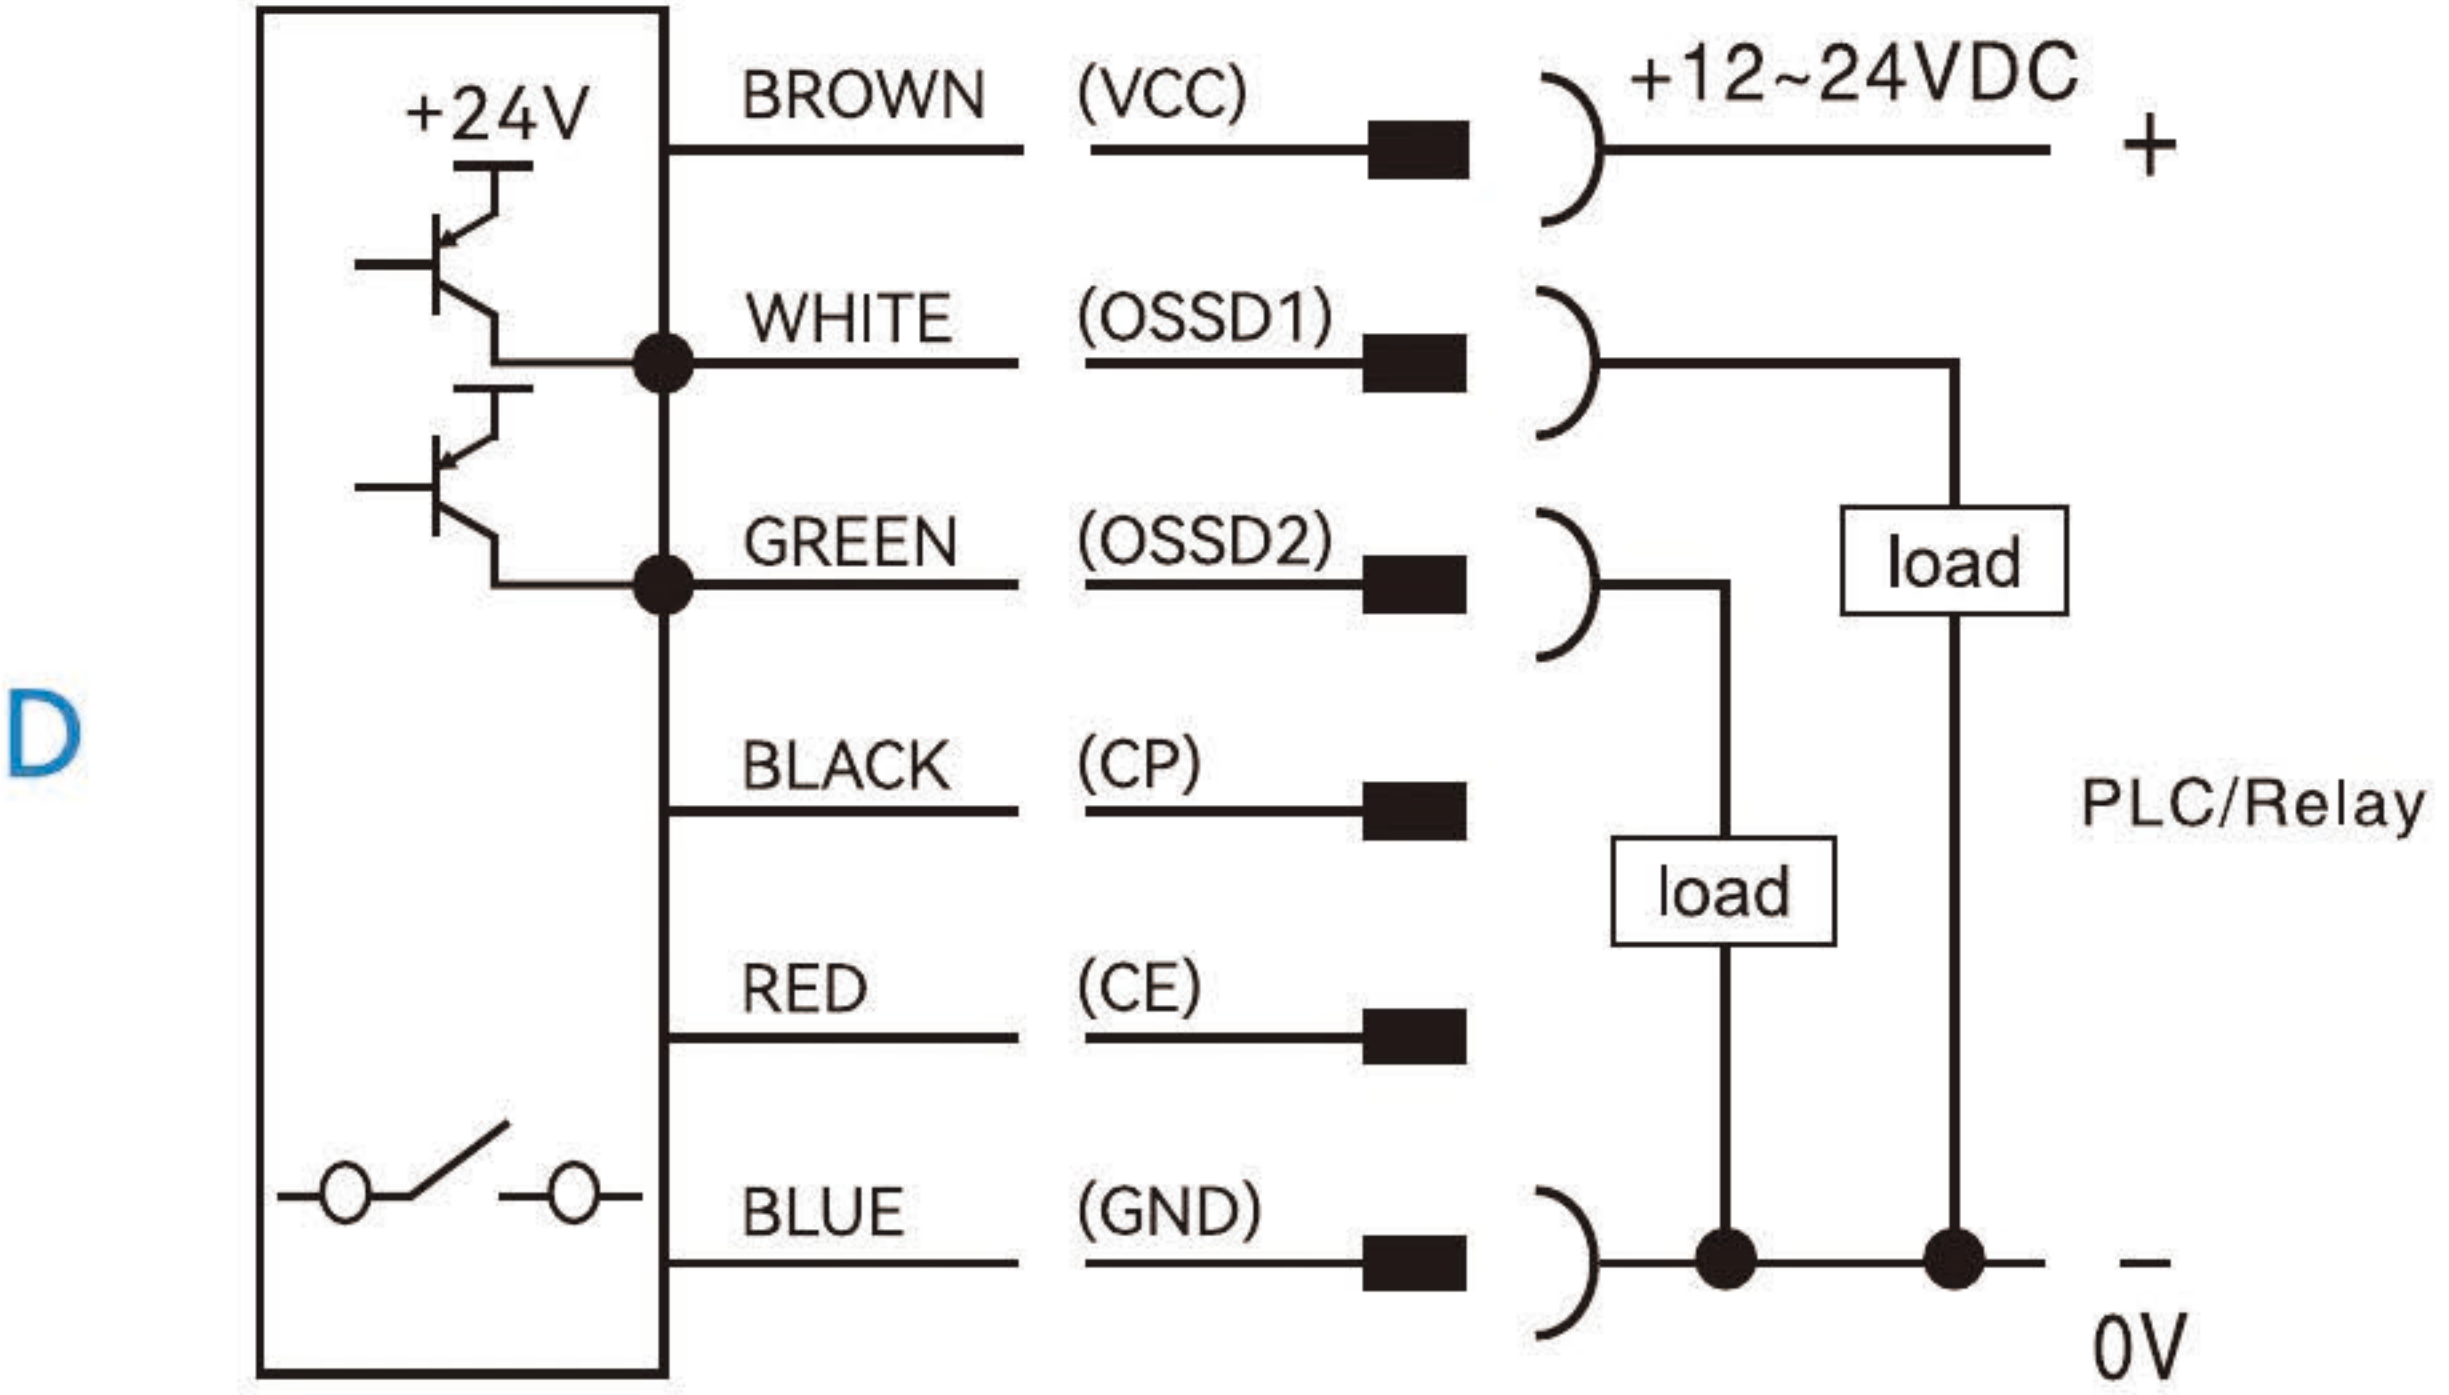


2. RS485/RS232 wiring diagram

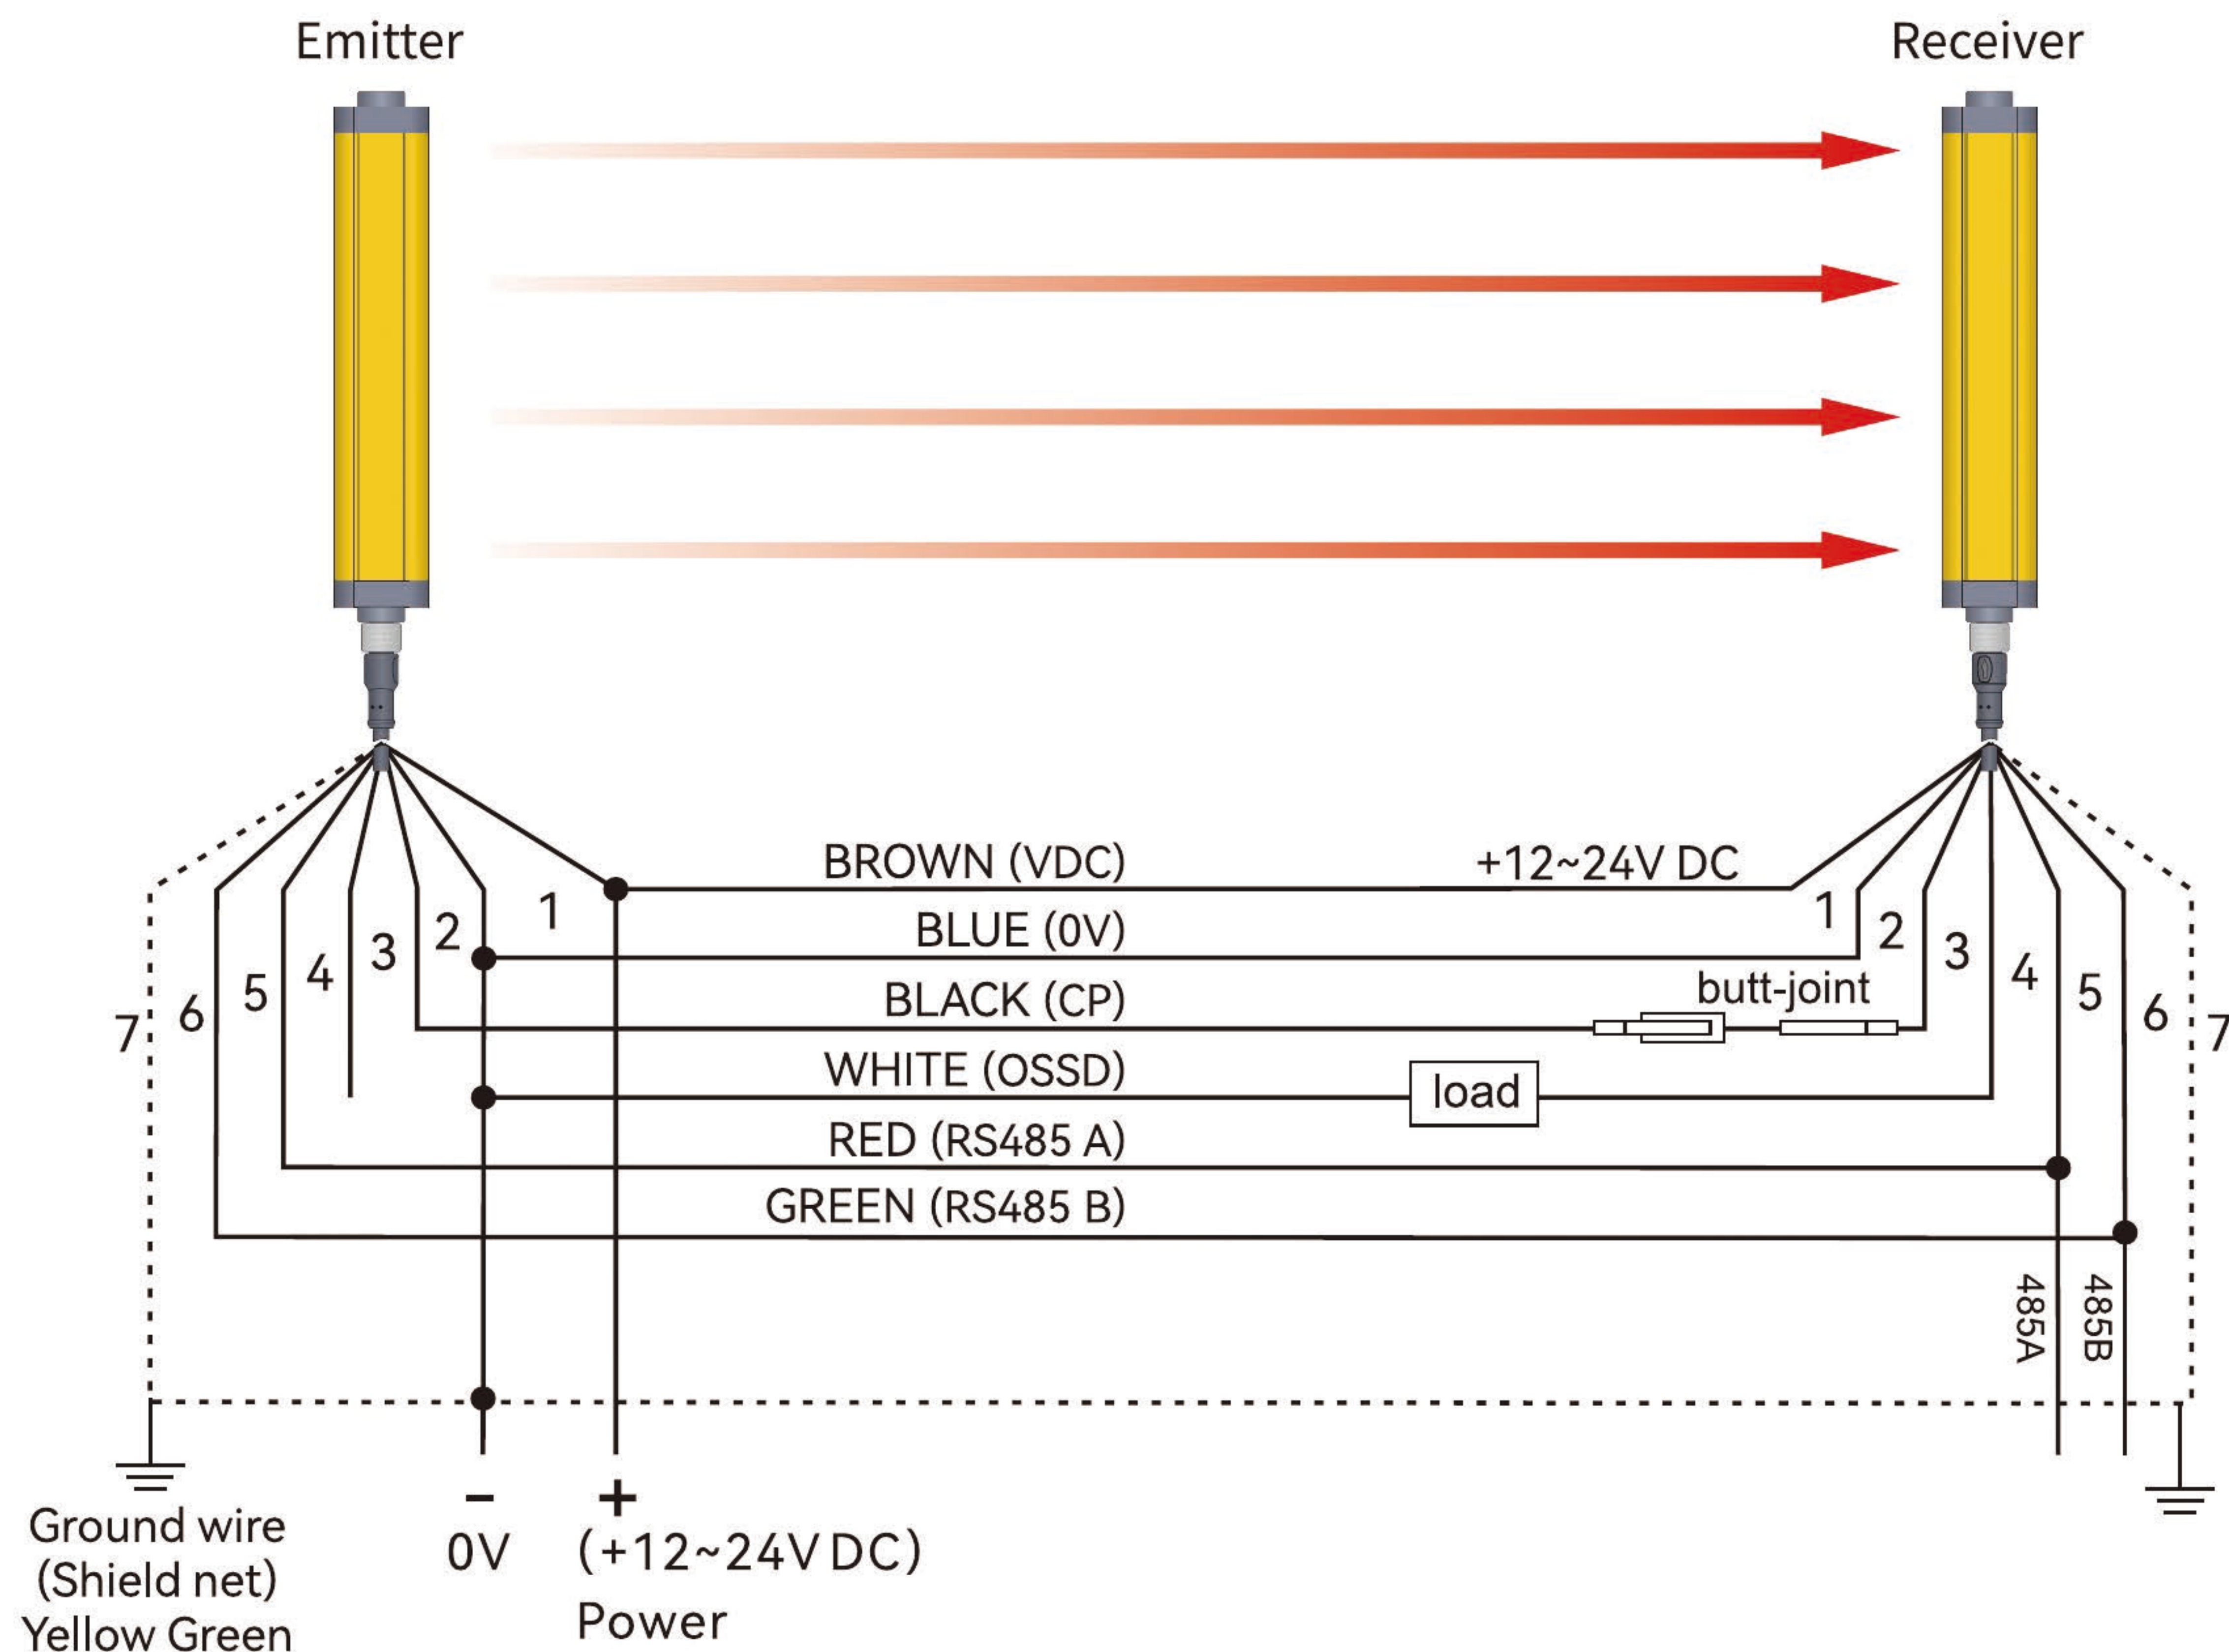



Can add a set of NPN or PNP outputs

3. PNP output wiring diagram

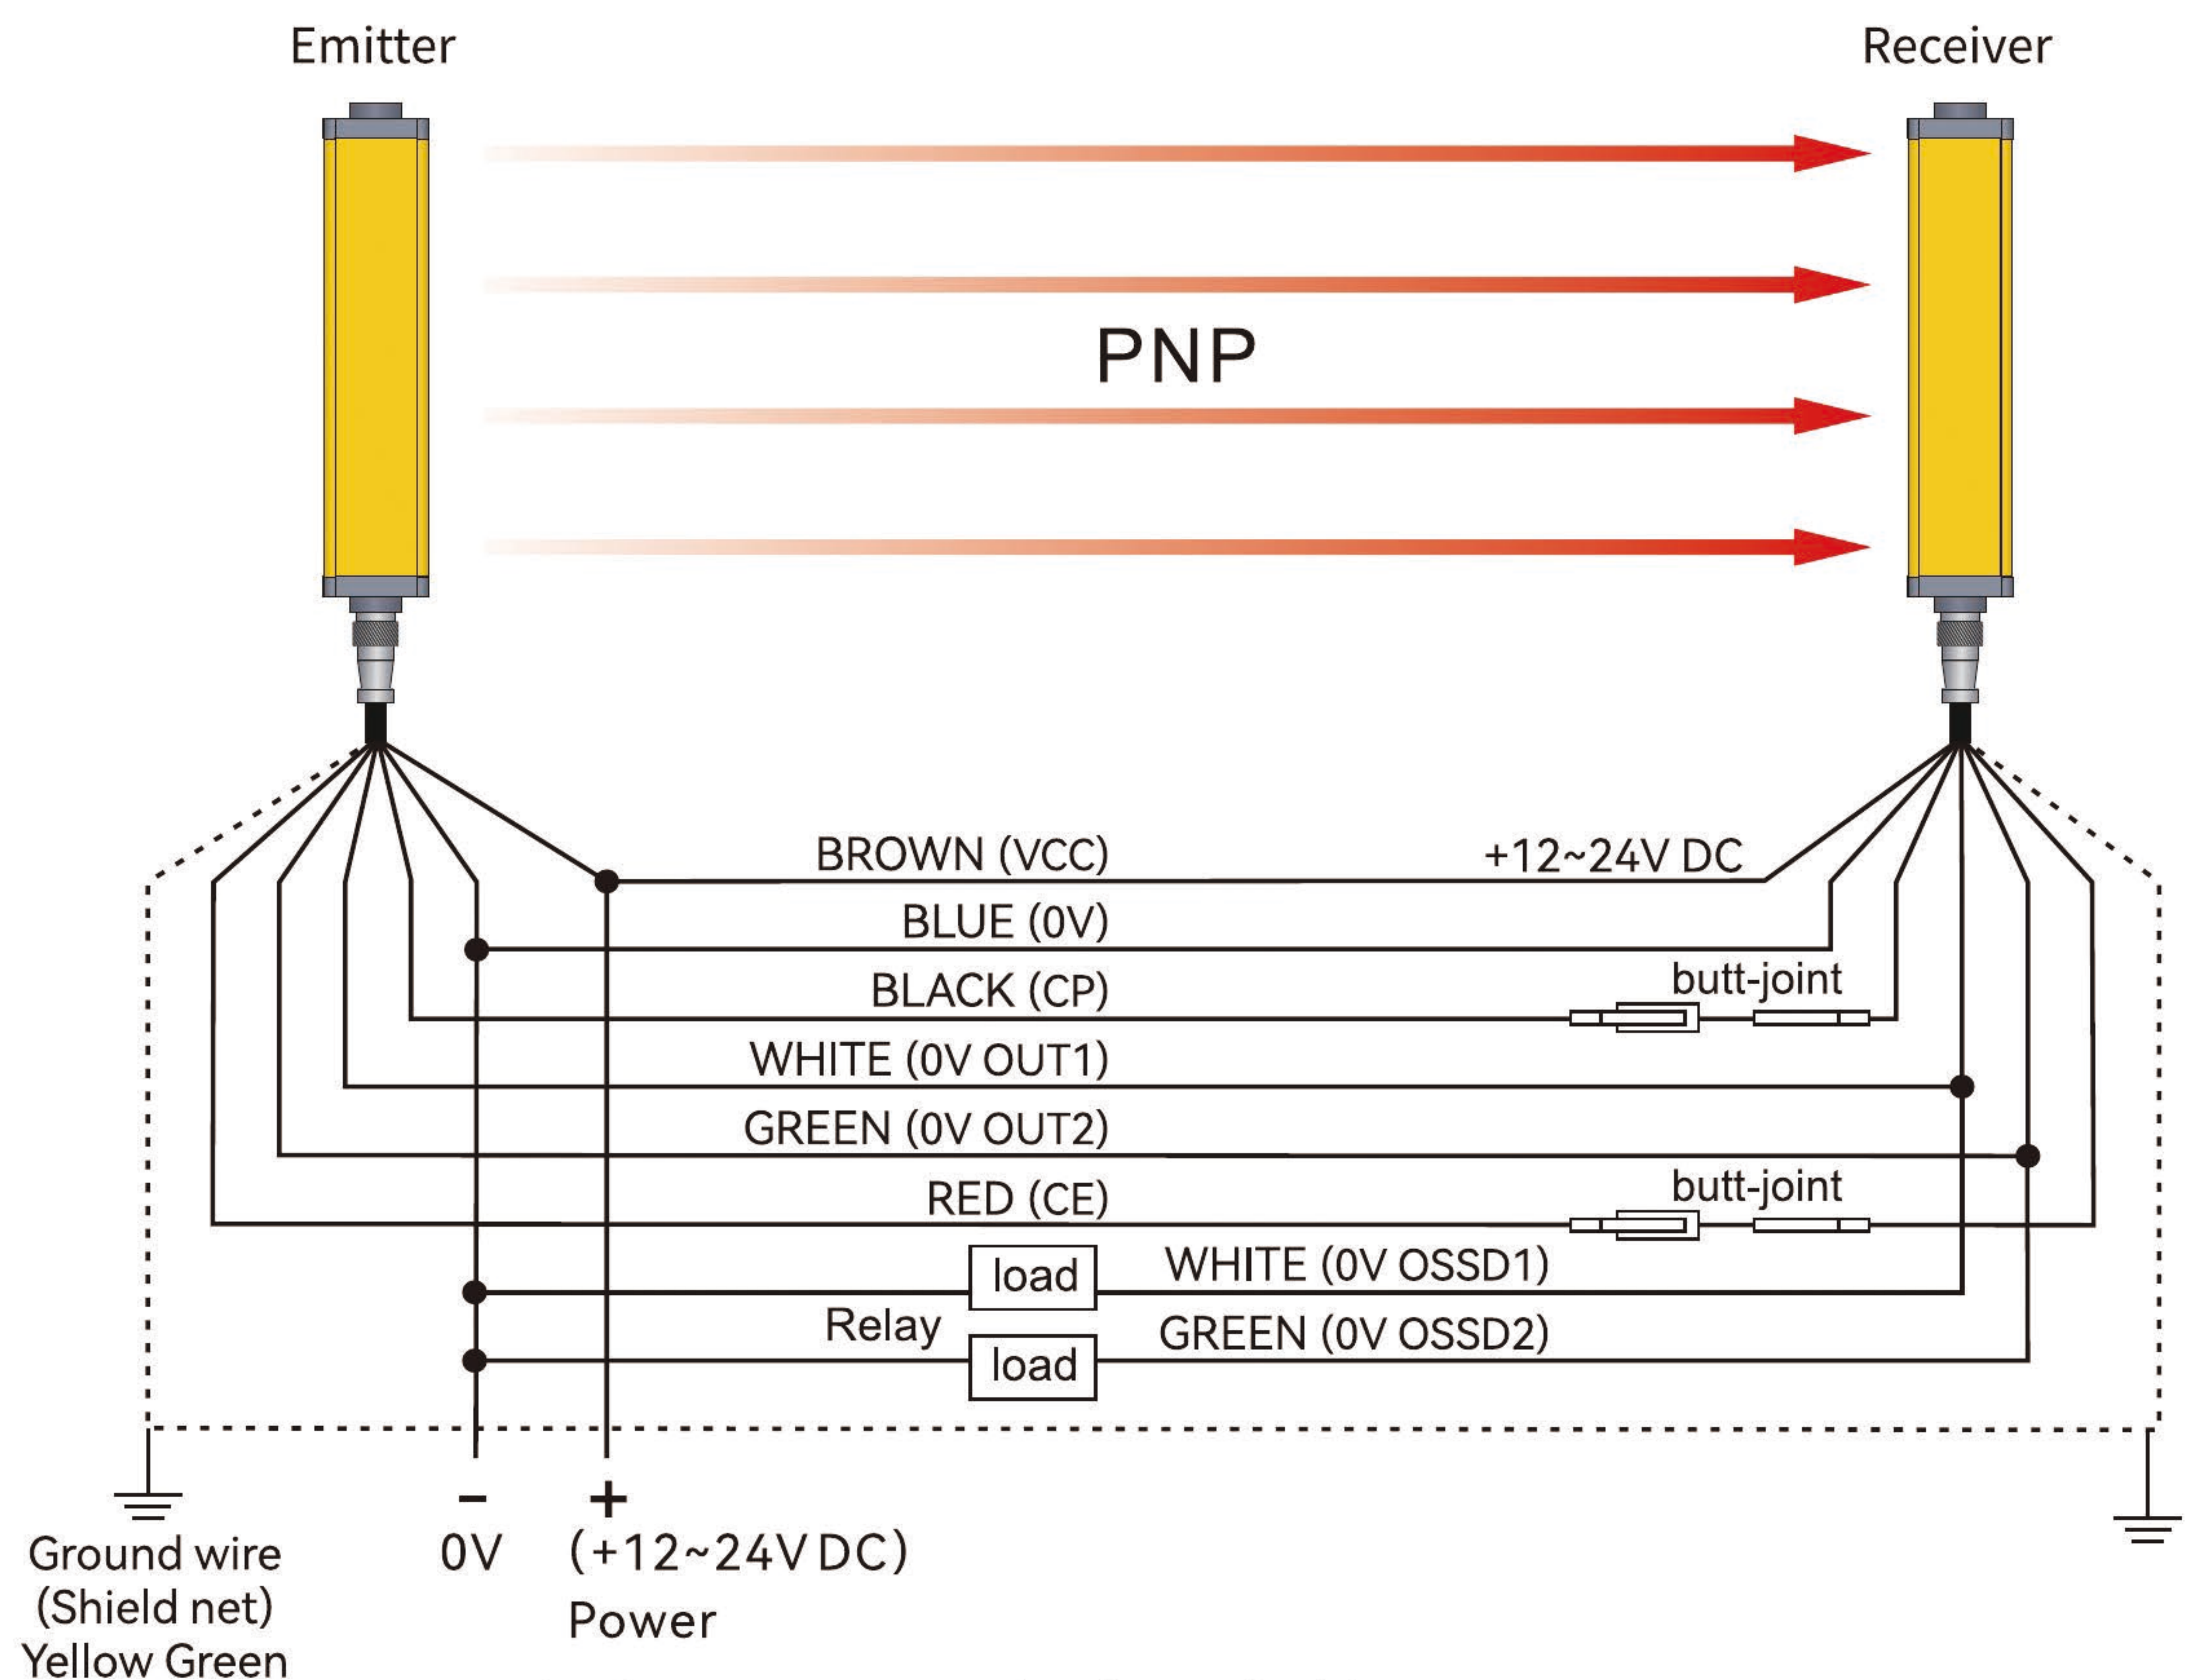

This figure is an example of PNP double output 7-pin wiring.

Outline size

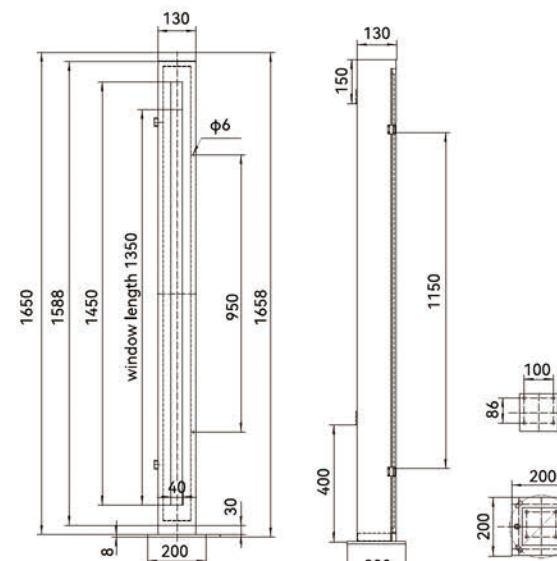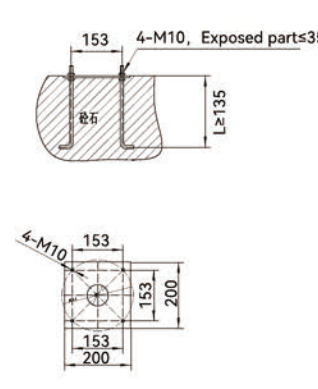Protective cover	Dimension (unit: mm)	
 (Order separately)	1.2mm stainless steel  Height: 1000/1550/1650/1950/2440/2760/3250mm (optional)	Embedment: 

Protective cover Wiring diagram:

